


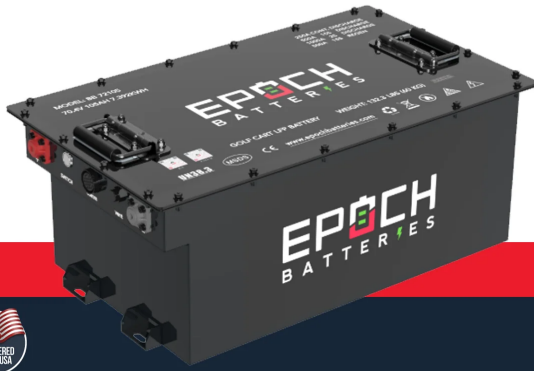

BB72105A KIT

Voltage: 70.4V | Capacity: 105 Ah | Energy: 7.392 kWh

Features: IP67, Bluetooth, 3500+ Cycles

11 YEAR
MANUFACTURER
WARRANTY

ELECTRICAL SPECIFICATIONS

Nominal Voltage	70.4 V
Nominal Capacity	105 Ah
Energy Stored	7.392KWH
Chemistry	LiFePO4
Cell Configuration	1P22S
Operating Voltage	55.0V - 79.2V
Series Parallel Connections	Max (2) in Parallel
Bluetooth:	Yes
Software Updates:	Yes (Over-the-air)
Self-Heating:	No

DISCHARGE SPECIFICATIONS

Max Continuous Discharge:	250A
Max Discharge 15 Sec:	500A
Max Discharge 2 Sec:	1,000A
Discharge Temp Range:	-20°C (-4°F) / 60°C (140°F)

TEMPERATURE SPECIFICATIONS

Discharge Temperature	-20°C(-4°F)/ 60°C(140°F)
Charge Temperature*	0°C(32°F)/ 55°C(131°F)
Recommended Storage Temperature	0°C(32°F)/ 35°C(95°F)

MECHANICAL SPECIFICATIONS

Dimensions (L x W x H)	21.7 x 13.4 x 9.9"
Weight	132 lbs
Case Material	Steel
Enclosure Protection	IP67
Cell Configuration	1P22S
Life Cycle	3500
Cell Type - Chemistry:	Prismatic - LiFePO4
Terminal Type:	M8 Female

CHARGE SPECIFICATIONS

Max Continuous Charge:	100A
Max Charge 15 Sec:	500A
Bulk/Absorption:	78.1V-79.2V
Absorption End Condition:	Stop when charge current ≤C/20 or 15 min max
Float Voltage:	Disabled (preferred) or 73.3V-74.8V
Re-bulk:	72.6V
Temperature Compensation:	0mV/°C (none)
Equalization:	Disabled
Battery Charge Temperature Range:	0°C (32°F) / 55°C (131°F)
BMS High Voltage Cutoff:	79.2V
SoC Recalibration:	79.2V

COMPLIANCE SPECIFICATIONS

Certifications	UL 1642 (Cells) UL 9540A (Cells) IEC 62619:2022 CE, RoHS
Shipping Classification	UN 38.3

DIMENSIONAL SPECIFICATIONS

